



Fastlane® Series Cable Protectors


- Light duty protectors offer a quick solution for minimal cable lines
- Solid construction for pedestrian traffic and light vehicle traffic
- Ideal for offices, light industrial applications, entertainment venues




Made from durable urethane, Fastlane Drop-Over Protectors feature heavy duty, patented L-connectors to easily attach additional protectors and extend to any desired length. These low profile protectors fit multiple cable sizes and are compact for easy setup, disassembly and storage.

- For lightweight vehicles and pedestrian traffic—patented 5-bar tread surface provides maximum traction
- Modular interlocking design for easy setup—patented L-connectors can extend to any length
- Available in 3 color options (specify color after model number)

■ O (orange)
 ■ B (black)
 ■ Y (yellow)

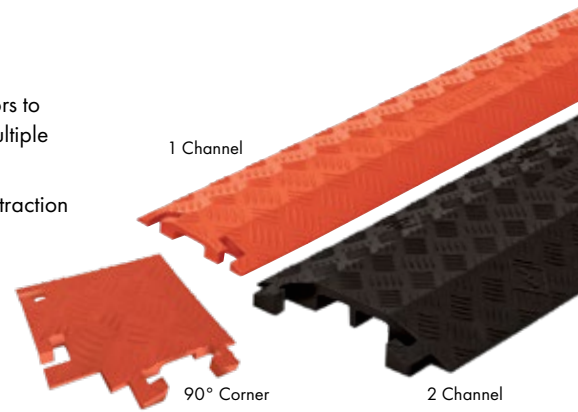

Load Capacity
Max load tested at 70°F (21°C)
1,050 lb/Tire (477 kg)
2,100 lb/Axle (954 kg)




Model	Description	Length	Width	Height	Channel Width	Maximum OD	Weight	Prop 65
1-Channel Cable Protectors								
FL1X1.5*	1.5 in Channel	36 in (91.44 cm)	5.25 in (13.33 cm)	.75 in (1.9 cm)	1.5 in (3.81 cm)	.5 in (1.27 cm)	3 lb (1.4 kg)	⚠
FL45LT1X1.5*	45° Left Turn	7 in (17.78 cm)	5.25 in (13.33 cm)	.75 in (1.9 cm)	1.5 in (3.81 cm)	.5 in (1.27 cm)	1 lb (.46 kg)	⚠
FL45RT1X1.5*	45° Right Turn							
FL90LT1X1.5*	90° Left Turn	7 in (17.78 cm)	7 in (17.78 cm)	.75 in (1.9 cm)	1.5 in (3.81 cm)	.5 in (1.27 cm)	1.8 lb (.82 kg)	⚠
FL90RT1X1.5*	90° Right Turn							
FL1X4*	4 in Channel	36 in (91.44 cm)	10.75 in (27.30 cm)	1.5 in (3.81 cm)	4 in (10.16 cm)	1 in (2.54 cm)	8 lb (3.6 kg)	⚠
FL45LT1X4*	45° Left Turn	12 in (30.48 cm)	10.25 in (26.04 cm)	1.5 in (3.81 cm)	4 in (10.16 cm)	1 in (2.54 cm)	4 lb (1.9 kg)	⚠
FL45RT1X4*	45° Right Turn							
FL90LT1X4*	90° Left Turn	12 in (30.48 cm)	12 in (30.48 cm)	1.5 in (3.81 cm)	4 in (10.16 cm)	1 in (2.54 cm)	6 lb (2.8 kg)	⚠
FL90RT1X4*	90° Right Turn							
2-Channel Cable Protectors								
FL2X1.75*	1.75 in Channel	36 in (91.44 cm)	10.75 in (27.3 cm)	1.5 in (3.81 cm)	1.75 in (4.45 cm)	1 in (2.54 cm)	9 lb (4.2 kg)	⚠
FL45LT2X1.75*	45° Left Turn	12 in (30.48 cm)	10.25 in (26.04 cm)	1.5 in (3.81 cm)	1.75 in (4.45 cm)	1 in (2.54 cm)	4 lb (1.9 kg)	⚠
FL45RT2X1.75*	45° Right Turn							
FL90LT2X1.75*	90° Left Turn	12 in (30.48 cm)	12 in (30.48 cm)	1.5 in (3.81 cm)	1.75 in (4.45 cm)	1 in (2.54 cm)	6 lb (2.8 kg)	⚠
FL90RT2X1.75*	90° Right Turn							

*Specify color option after model number

Anti-Slip Traction Kits

Model	Description	Weight	Prop 65
CPRPKIT.75-18	Anti-Slip Rubber Pad Kit (includes 18 rubber pads) for FL1X1.5	.11 lb (.05 kg)	⚠
CPRPKIT1-8	Anti-Slip Rubber Pad Kit for FL1X4 and FL2X1.75 (includes 8 anti-slip rubber pads)	.11 lb (.05 kg)	⚠
CPGLUE	½ oz. Bottle of Checkers Clear Super Glue (best if kept refrigerated). Use for permanent application of Anti-Slip Rubber Pads	.07 lb (.032 kg)	⚠
CPCARPETKIT-3	Carpet Kit with Velcro® Brand Fasteners for all Fastlane Cable Protectors with Standard Ramps (includes two 37 in x .25 in Black Traction Strips and a ½ oz. Bottle of Checkers Clear Super Glue)	.09 lb (.041 kg)	⚠

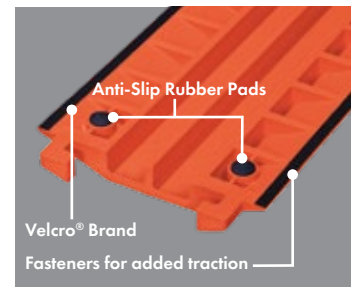

⚠ WARNING: This product can expose you to chemicals including carbon black, titanium dioxide, formaldehyde, and benzyl butyl phthalate, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Checkers

620 Compton St
Broomfield, CO 80020

Phone: (800) 438-9336 **Fax:** (720) 890-4858
Email: sales@checkers-safety.com

Checkers-Safety.com